

GENERAL EROSION AND SEDIMENTATION CONTROL NOTES

ALL CONSTRUCTION ACTIVITIES SHALL COMPLY WITH LOCAL, STATE AND FEDERAL ORDINANCES, BY-LAWS AND REGULATIONS.

THE BMP'S TO BE USED DURING PROJECT CONSTRUCTION ARE TO PREVENT THE GENERATION OF EROSION PRODUCTS AND THEIR TRANSPORT TO ENVIRONMENTALLY AND OFF-SITE SENSITIVE AREAS. ENVIRONMENTALLY AND OFF-SITE SENSITIVE AREAS INCLUDE ALL DESIGNATED RESOURCE AREAS, AREAS OF THE SITE THAT DO NOT NEED TO BE ALTERED FOR DEVELOPMENT PURPOSES AND ALL OFF-SITE ADJUTING PROPERTIES AND ROADWAYS.

THE CONTRACTOR SHALL USE A METHOD OF OPERATION AND CONSTRUCTION AND ALL NECESSARY EROSION AND SEDIMENTATION CONTROL MEASURES EVEN IF NOT SPECIFIED HEREIN OR ON THE PLANS, TO MINIMIZE EROSION DAMAGE ON AND OFF SITE. THE CONTRACTOR SHALL BE SOLELY RESPONSIBLE FOR EROSION AND SEDIMENTATION CONTROL ON SITE.

THE BMP'S IDENTIFIED BELOW SHALL BE USED AS A GUIDE FOR EROSION AND SEDIMENTATION CONTROL AND DO NOT REPLACE THE PRACTICE OF GOOD JUDGMENT, COMMON SENSE AND THOUGHTFUL ENVIRONMENTALLY SENSITIVE CONSTRUCTION PRACTICES.

PRIOR TO ANY WORK, GRUBBING, STRIPPING, BRUSH REMOVAL, GRADING OR EARTH REMOVAL THE FOLLOWING EROSION CONTROL DEVICES SHALL BE IN PLACE AS SHOWN ON THE PLANS AND/OR AS OTHERWISE REQUIRED OR DEEMED NECESSARY BY THE ENGINEER AND/OR MUNICIPAL INSPECTOR.

LIMIT OF WORK AND SPOIL PILE SILT SOCK STONED CONSTRUCTION ENTRANCE

ALL EROSION AND SEDIMENT CONTROL DEVICES SHALL BE MAINTAINED AND REPAIRED ON A CONTINUING BASIS DURING THE CONSTRUCTION PROCESS.

ADDITIONAL EROSION AND SEDIMENT CONTROL DEVICES SHALL BE ON-SITE TO REPLACE ANY AREAS OF BARRIERS DISTURBED OR REQUIRING REPAIR DURING CONSTRUCTION.

DISTURBED AREAS SHALL BE LIMITED TO THE SMALLEST PRACTICAL MANAGEABLE AREA. WHEN DISTURBED AREAS ARE TO BE LEFT UNFINISHED FOR PROLONG PERIODS, THE AREA SHALL BE TEMPORARILY STABILIZED BY SEEDING OR MULCH.


DUST SHOULD BE HELD AT A MINIMUM BY SPRINKLING EXPOSED SOIL WITH AN APPROPRIATE AMOUNT OF WATER.

MULCHING SHALL BE USED FOR TEMPORARY STABILIZATION OF EXPOSED AREAS.

MATERIAL STOCKPILES NOT IN USE SHALL BE LINED WITH HAY BALE DIKES, SILT FENCES OR SILT SOCKS, TO PREVENT THE TRANSPORT OF MATERIALS TO ENVIRONMENTALLY AND OFF-SITE SENSITIVE AREAS

ALL DISTURBED AREAS ARE TO BE LOAMED AND SEEDED OR COVERED WITH OTHER SUITABLE GROUND COVER AS SOON AS POSSIBLE UPON COMPLETION OF CONSTRUCTION.


SEDIMENT CONTROL DEVICES SHALL REMAIN IN PLACE UNTIL VIGOROUS GROUND COVER HAS BEEN ESTABLISHED.

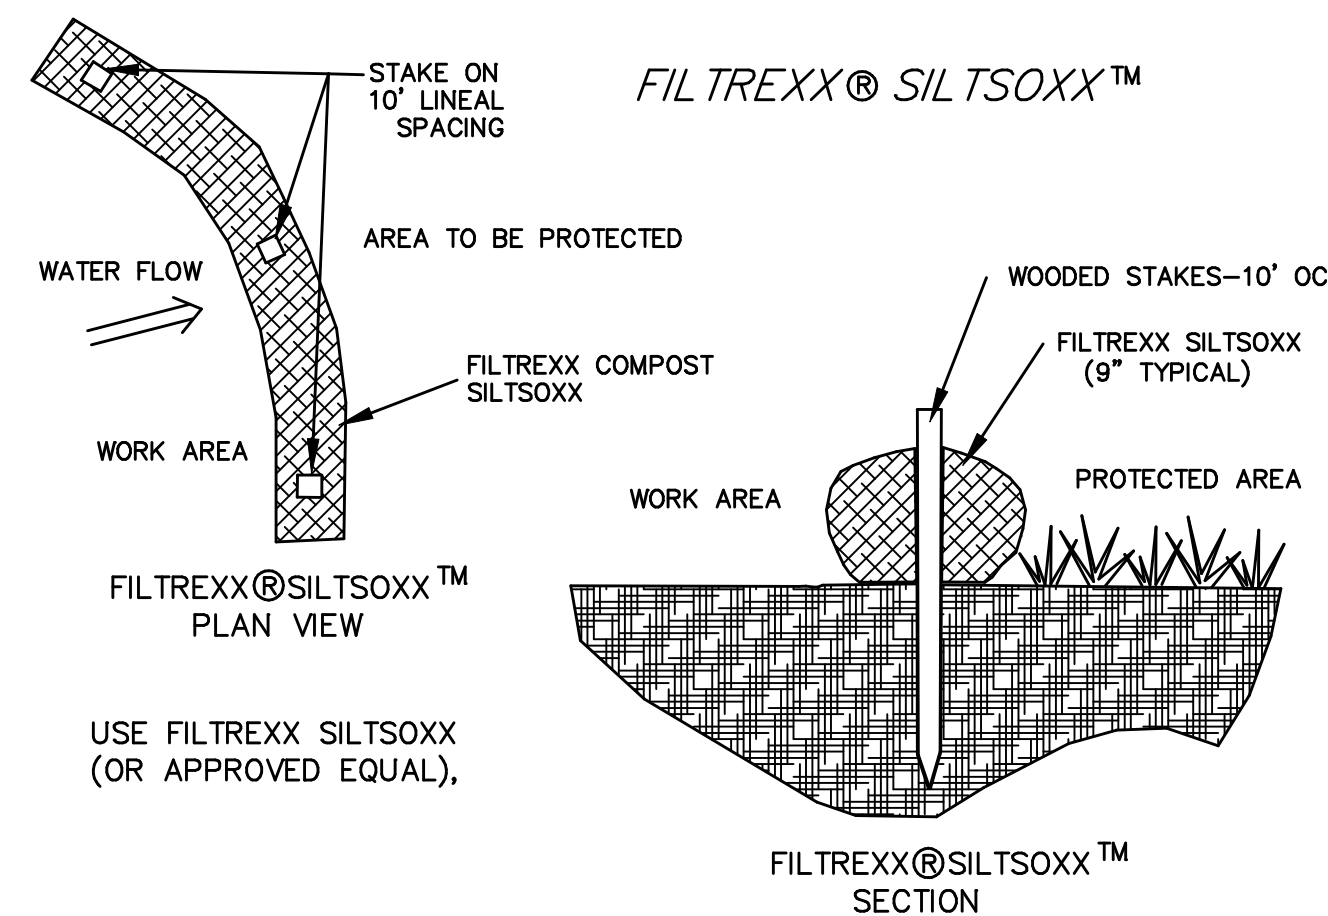

- NOTES:
1. ALL MATERIALS TO MEET FILTREXX SPECIFICATIONS.
 2. SILTSOXX COMPOST/SOIL/ROCK/SEED/FILL TO MEET APPLICATION REQUIREMENTS.
 3. SILTSOXX DEPICTED IS FOR MINIMUM SLOPES. GREATER SLOPES MAY REQUIRE LARGER SOCKS PER ENGINEER.
 4. COMPOST MATERIAL TO BE DISPERSED ON SITE, AS DETERMINED BY ENGINEER.

SILTATION BARRIER

N. T. S.

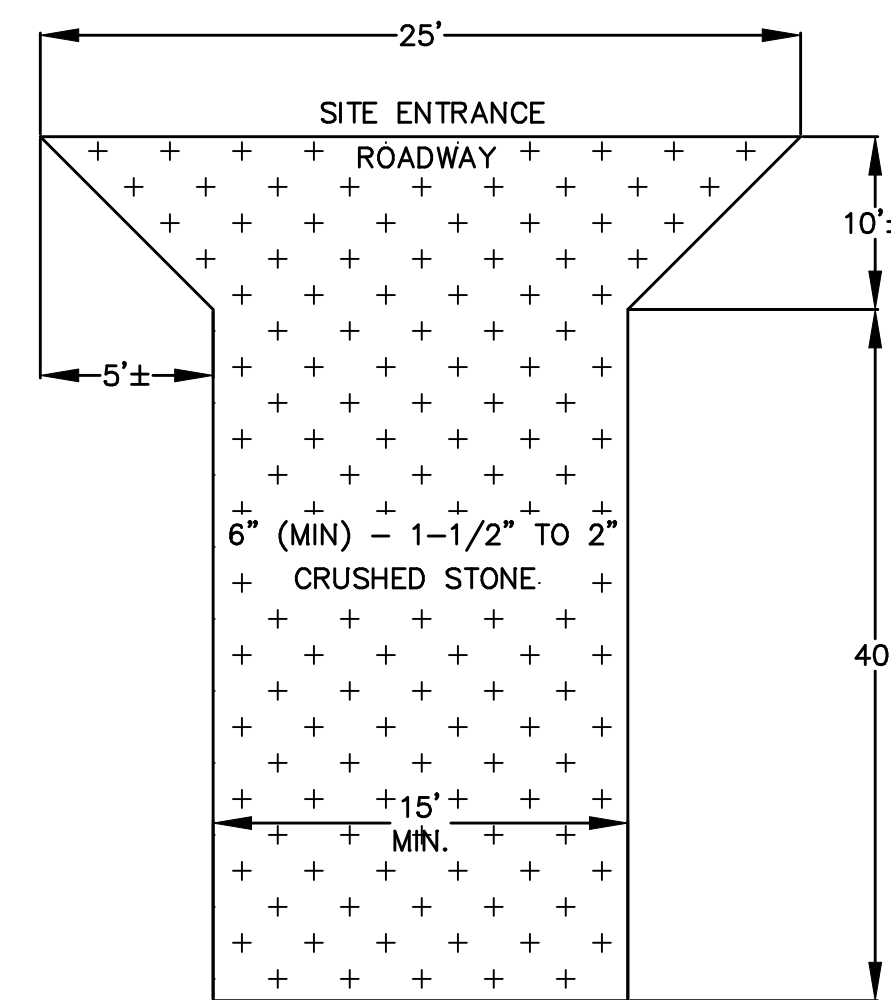

STONED ENTRANCE

N. T. S.

**PERMIT PLAN
AT
6 GUNNISON ROAD
IN
BOXFORD, MASSACHUSETTS**

DETAILS

ASSESSORS MAP 34 BLOCK 1 PARCEL 43

PREPARED FOR: MICHAEL COGLEY
6 GUNNISON ROAD
BOXFORD, MA

ENGINEER:
ATLANTIC ENGINEERING & SURVEY CONSULTANTS INC.
97 TENNEY STREET - GEORGETOWN, MA 01833
PHONE: 978-352-7870 FAX: 978-352-9940

DRAWING FILE: \SEQ94\6GUNNISON

JOB NO. A2010-02 DATE: FEB. 5, 2021

revision #	date	description

